


DU-5K-TB

DATE	CHANGES	INTL	REV
09.11.08	Original	JB	1.0
03.25.10	Updated mounting hole dimensions	JB	2.0

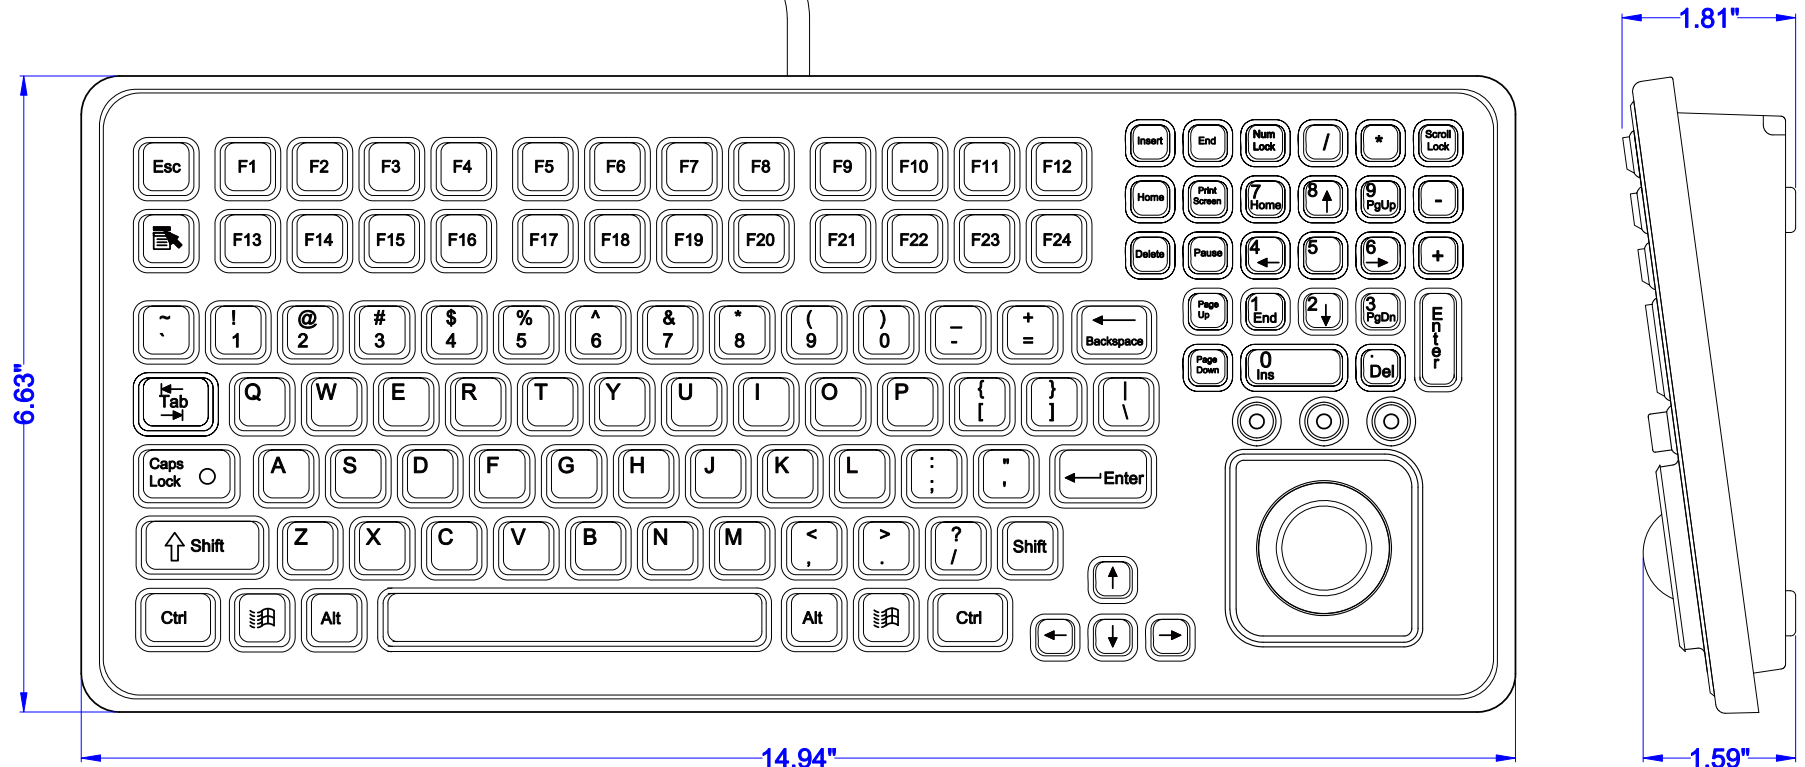

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
LIFE: Greater Than 10 Million Cycles
TRAVEL: 0.055 in.
ACTUATION FORCE: 6.35 oz. +/- 1.06oz (180g +/- 30g)
FEEDBACK: Tactile with Mechanical Snap

POWER

PS2:
KEYBOARD: 50mA@5V (from Keyboard port)
POINTER: 45mA@5V (from Mouse port)
USB: 95mA@5V (from CPU port)

TEMPERATURE RANGE

STORAGE: -40°F to +185°F (-40°C to +85°C)
OPERATING: +32°F to +149°F (0°C to +65°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
FREQUENCY RANGE: 20Hz-2Khz
DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

2.25 lbs +/- 0.10 lbs (1.02 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754


©2010 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8630

Part Number: DU-5K-TB
Drawing Title: DU-5K-TB-MKT

Drawing Number: MKT0147
Revision: 2.0

Sheet: 1 OF 2
Date: 03.25.10
JWB

DU-5K-TB BACK / MOUNTING

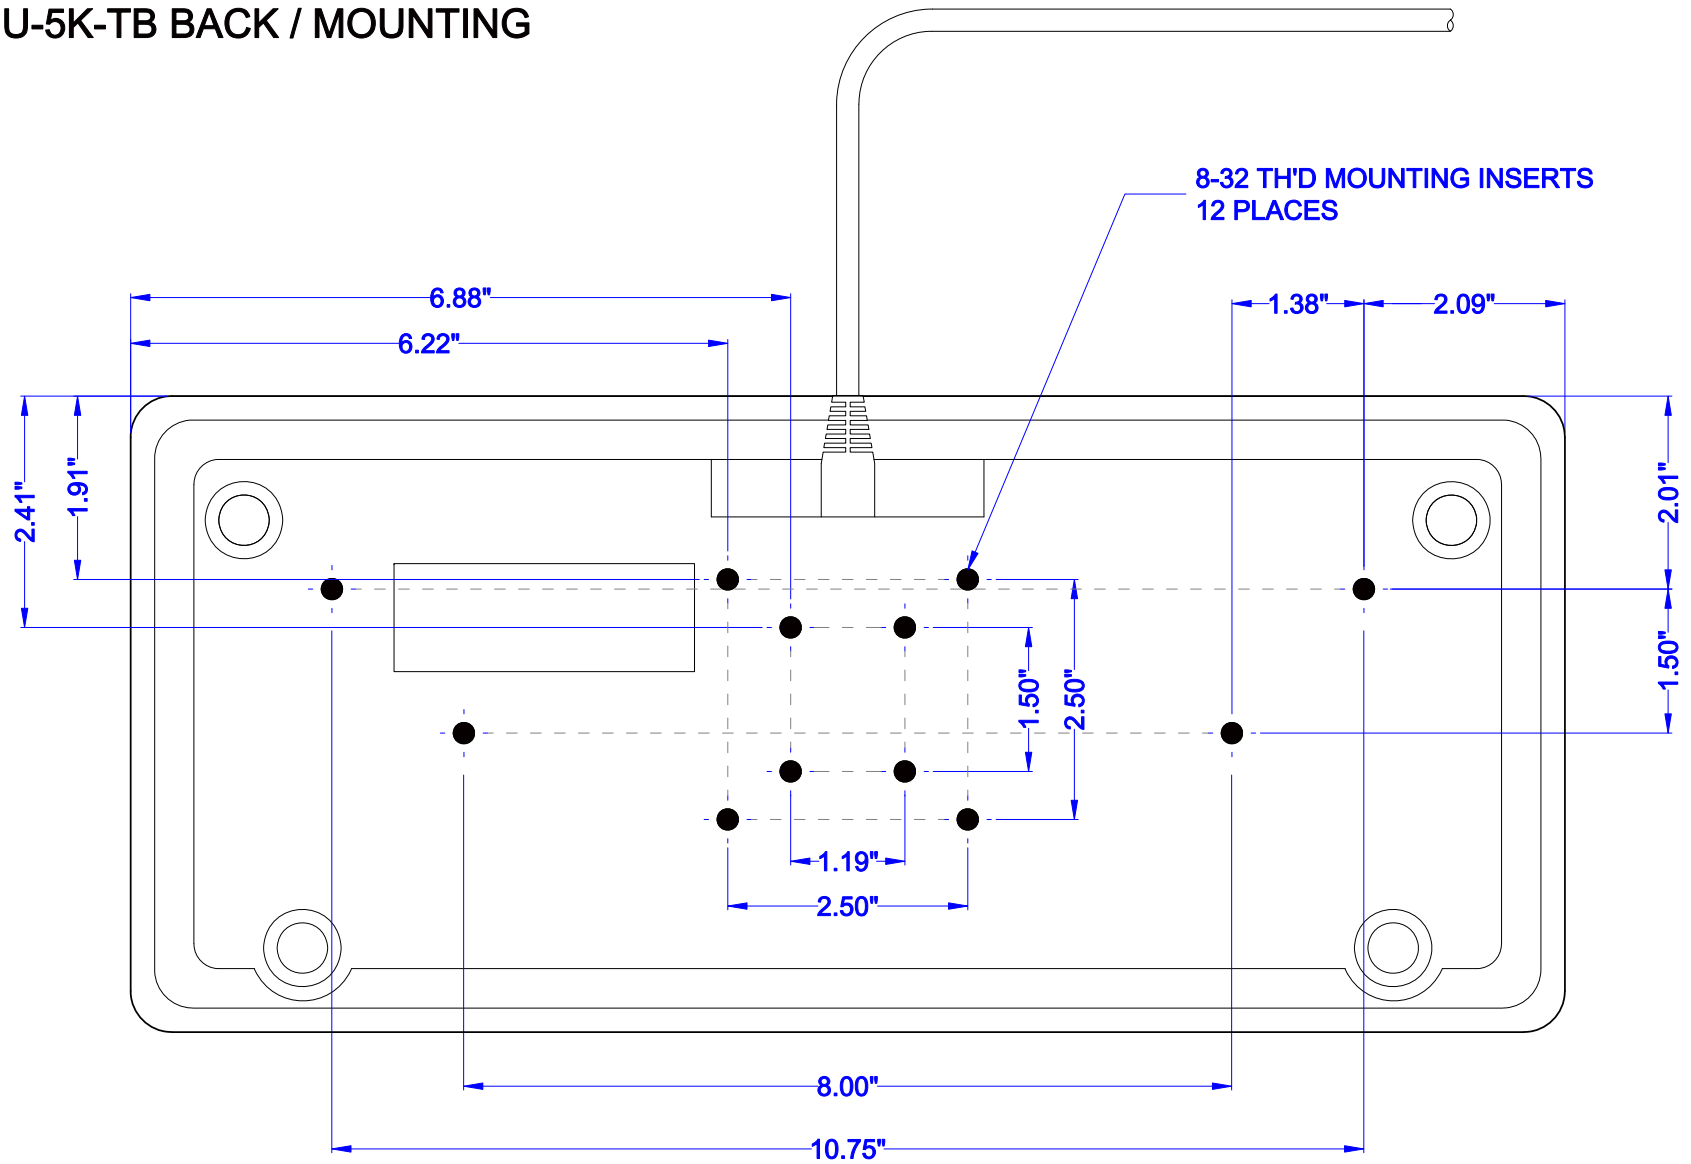

ENCLOSURE CASE: ABS/Polycarbonate

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

©2010 iKey, Ltd.
Voice: (512) 837-0283
Fax: (512) 927-8630

Part Number: DU-5K-TB
Drawing Title: DU-5K-TB-MKT

Drawing Number: MKT0147
Revision: 2.0

Sheet: 2 OF 2
Date: 03.25.10
JWB