


DU-5K-TP2

DATE	CHANGES	INTL	REV
12.28.07	Original		1.0
07.01.08	Updated format	JB	1.0
04.29.09	Updated power spec	JB	1.1
03.25.10	Updated mounting hole dimensions	JB	2.0
01.05.11	Updated Temp Spec	JMW	2.1
01.31.11	Improved PDF/Print resolution	TWH	2.2

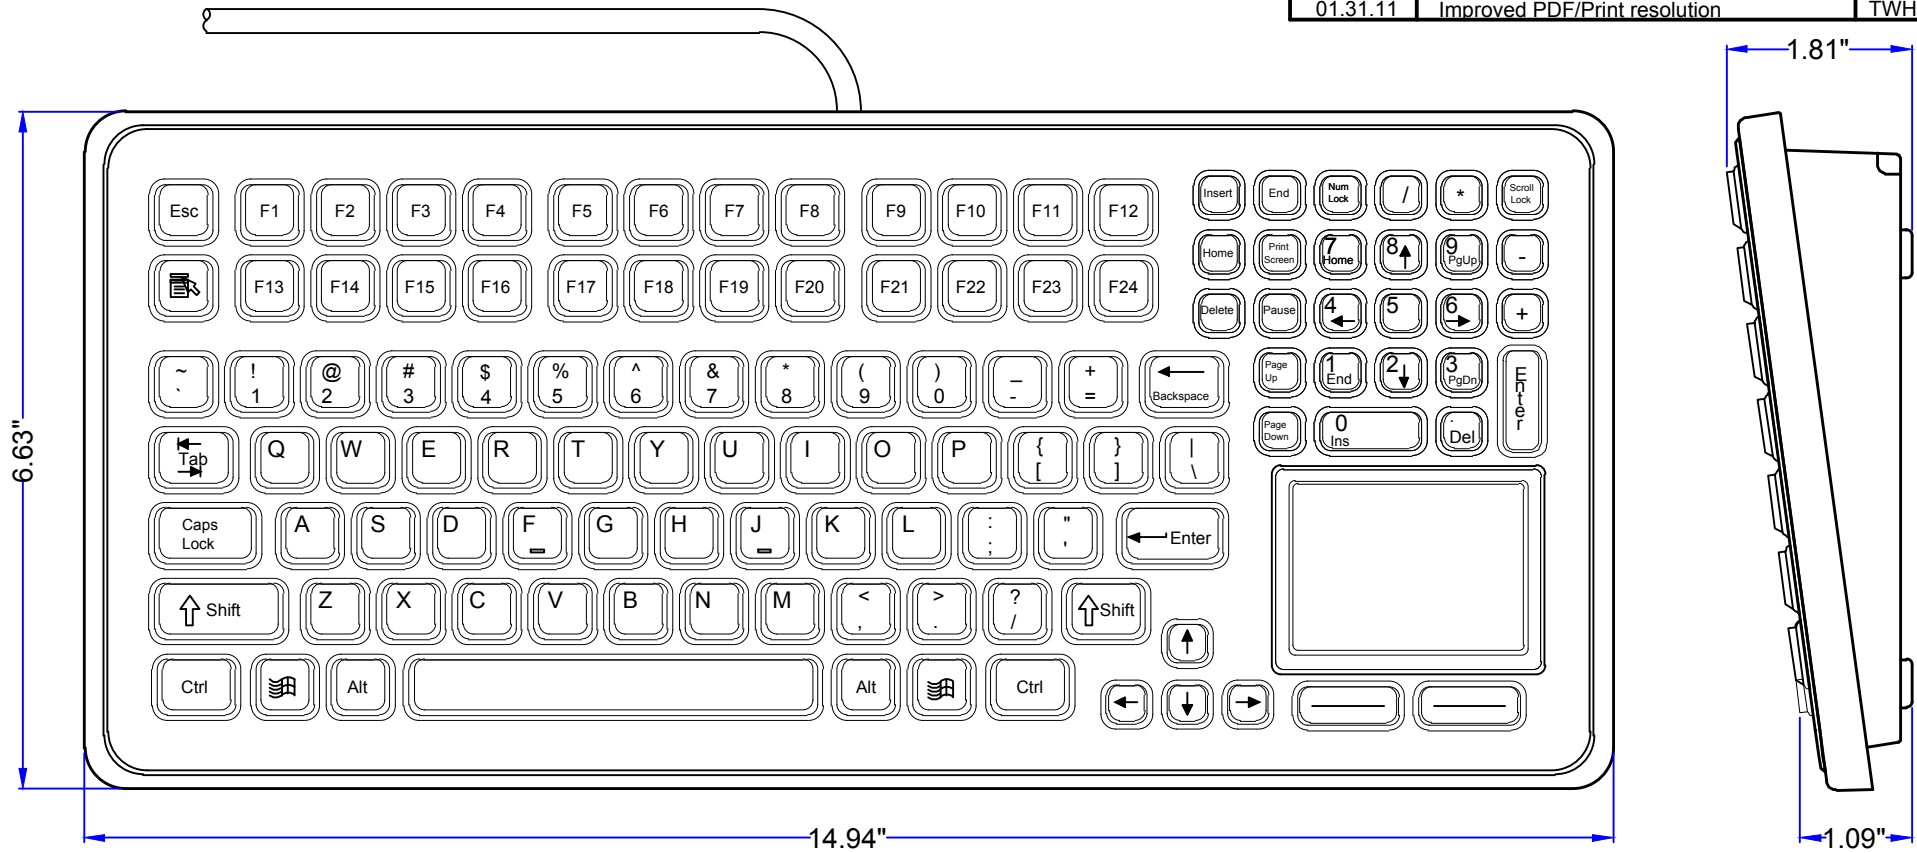

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 6.35 oz. +/- 1.06oz (180g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

POWER

PS2:
 KEYBOARD: 50mA@5V (from Keyboard port)
 POINTER: 10mA@5V (from Mouse port)
 USB: 60mA@5V (from CPU port)

TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)
 OPERATING: -40°F to +158°F (-40°C to +70°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

SHOCK


3 X 11 ms pulses of 50g on each of 3 axes

WEIGHT

2.25 lbs +/- 0.10 lbs (1.02 kg +/- 0.05 kg)



DU-5K-TP2 BACK / MOUNTING

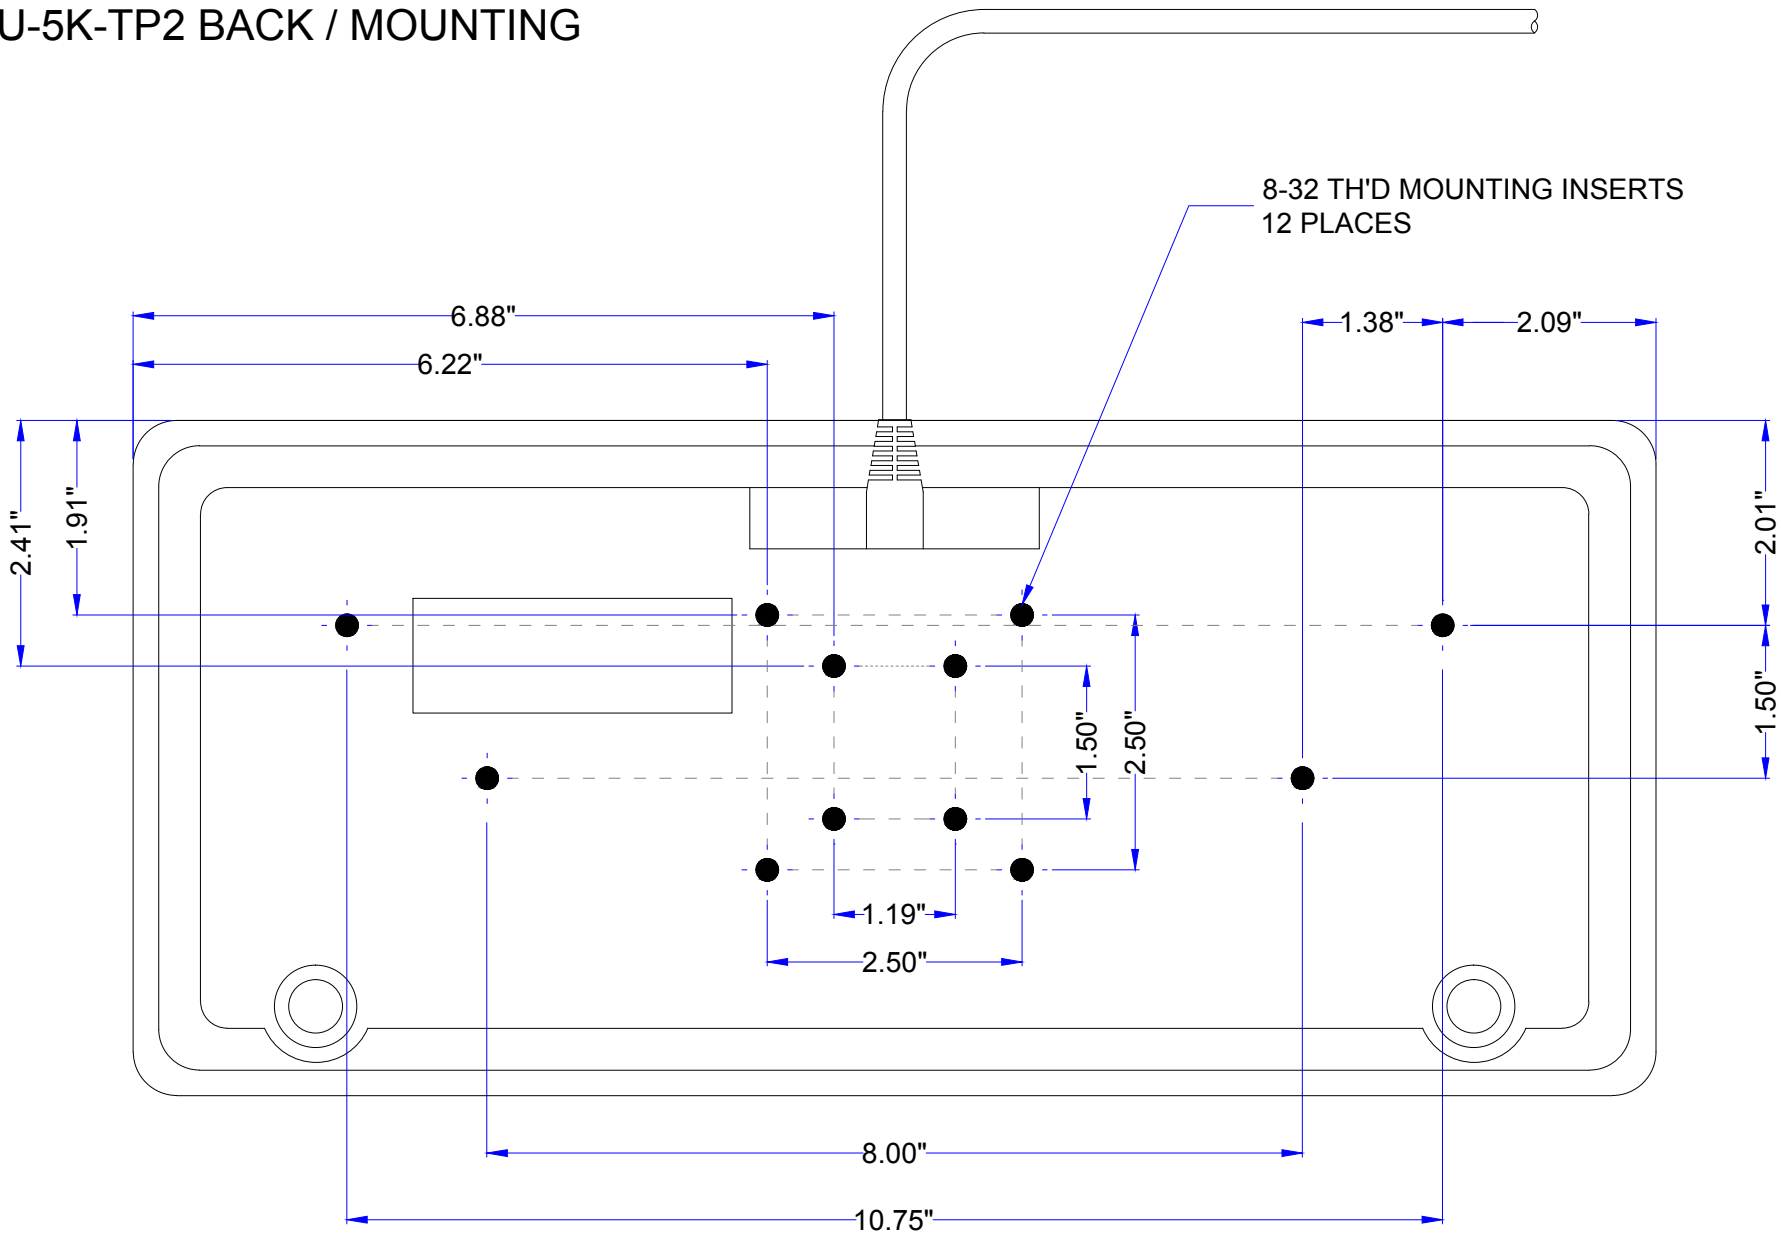

ENCLOSURE CASE: ABS/Polycarbonate

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

©2011 iKey, Ltd.

Voice: (512) 837-0283
Fax: (512) 927-8530

Part Number: DU-5K-TP2

Drawing Title: DU-5K-TP2-MKT

Drawing Number: MKT0081

Revision: 2.2

Sheet: 2 OF 2

Date: 01.31.11

TWH