
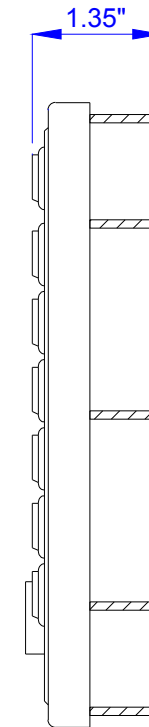


SLP-86-911-461

DATE	CHANGES	INTL	REV
08.13.10	Original	JMW	1.00

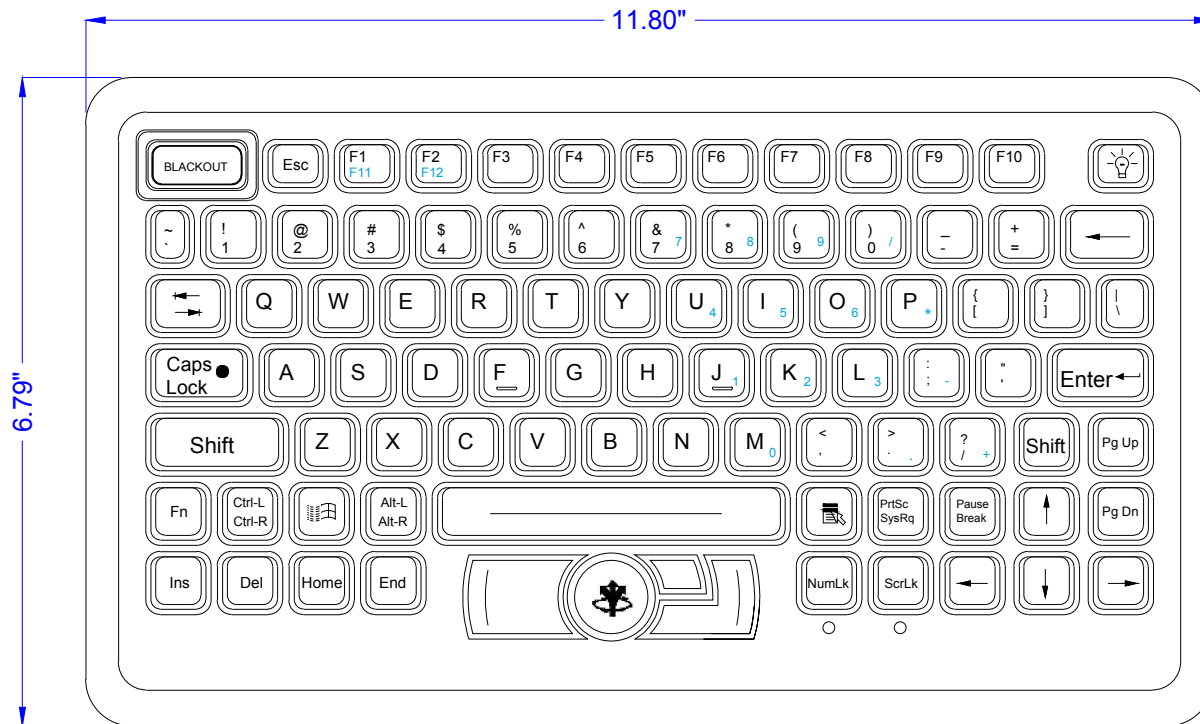

**KEY SWITCH**

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)  
 FEEDBACK: Tactile with Mechanical Snap

**TEMPERATURE RANGE**

STORAGE: -40°F to +158°F (-40°C to +90°C)  
 OPERATING: -4°F to +140°F (-40°C to +70°C)

**VIBRATION**

POWER SPECTRAL DENSITY: .04g/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours

**POWER**

PS2: 250mA@5V (from PS2 port)

**HUMIDITY**

100% Humidity Resistant

**SHOCK**

3 X 11 ms pulses of 50g on each of 3 axis

**WEIGHT**

1.75 lbs +/- 0.10 lbs (0.79 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.  
 2621 Ridgpoint Dr. Suite 235  
 Austin, Texas 78754


©2010 iKey, Ltd.  
 Voice: (512) 837-0283  
 Fax: (512) 927-8530

Part Number: SLP-86-911-461  
 Drawing Title: SLP-86-911-461-MKT

Drawing Number: MKT0239  
 Revision: 1.00

Sheet: 1 OF 2  
 Date: 08.13.10  
 JMW

# SLP-86-911-461 MOUNTING

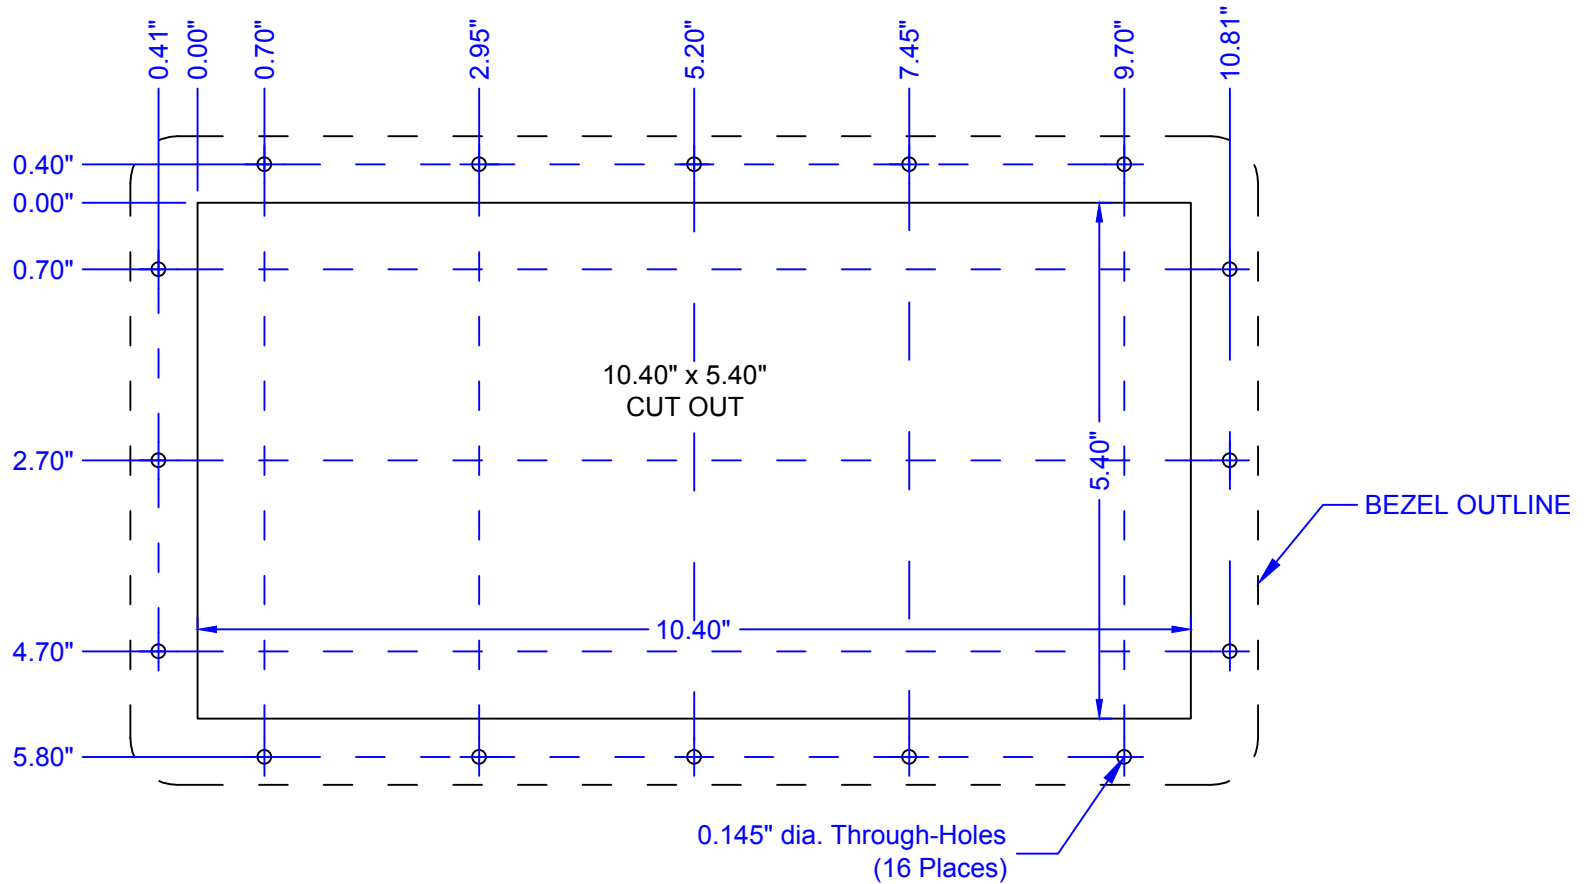

PMU BEZEL: ABS/Polycarbonate with #4-40 x 0.75" Metal Studs (16 Places)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.  
2621 Ridgpoint Dr. Suite 235  
Austin, Texas 78754

©2010 iKey, Ltd.  
Voice: (512) 837-0283  
Fax: (512) 927-8530

Part Number: SLP-86-911-461

Drawing Title: SLP-86-911-461-MKT

Drawing Number: MKT0239

Revision: 1.00

Sheet: 2 OF 2

Date: 08.13.10

JMW